


## Straight Guardrail Delineator

(Mounts to Guardrail Support Posts)

### Easy Installation on Wood or Metal Posts

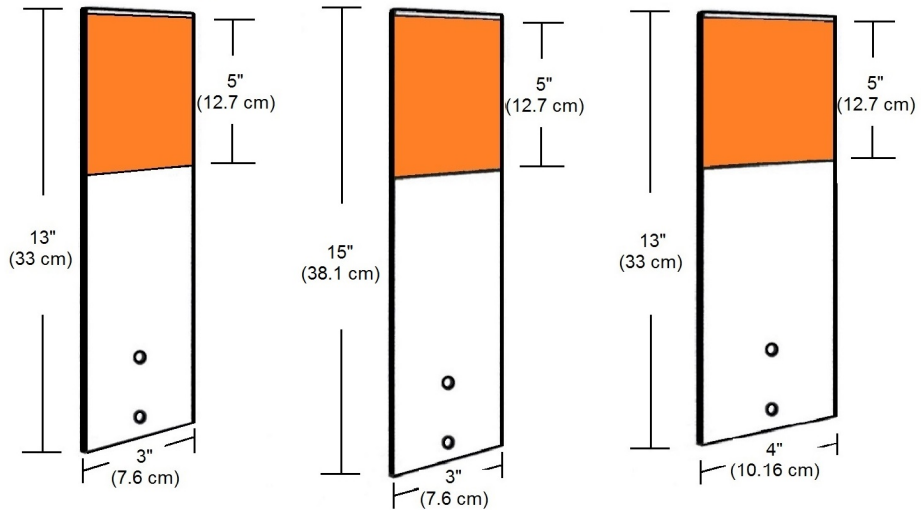

(Cal Trans specification is 10" height)

### Reflective Sheeting\*

1Y --> Yellow 1-way

2Y --> Yellow 2-way

1W --> White 1-way

2W --> White 2-way

\*Additional colors available by special order

The bodies shall be made from a high-impact, weatherable engineering thermoplastic .090 (min) thick that conforms to the following:

Property	Results	ASTM Test Method
Tensile Strength @ Yield (min. psi)	5,000	D638
Impact Strength @ 73°F (Ft #/in notch)	10.0	D256
Impact Strength @ -40°F	1.5	D256
Flexural Strength 1/4" @ 73°F	8,000	D790
Flexural Modulus 1/4" @ 73°F	24,000	D790

The reflector shall be permanently affixed with retro-reflective acrylic microprism tape with acrylic backing, or approved equal. The tape (white) shall have a minimum reflectance of 1,000 candlepower per footcandle per square foot (candelas/lux/m<sup>2</sup>) at 0.1° observation and -4° entrance angles. (Yellow tape shall be 60% of the white.) Photometric performance for various models is available upon request.

### Straight Style

*Straight Delineators* may be mounted directly to wooden or metal guardrail support posts. Use 2-16 DG nails and 2 - 3/16 washers in predilled holes for wooden support post. Or Artuk adhesive Cement for metal support posts.

1200 Abbott Dr, Elgin, IL 60123

Phone: (847) 841-7050, Fax: (847) 488-9154

Email: [info@artukinc.com](mailto:info@artukinc.com), Web: <http://ArtukInc.com>